Art.No.	article name
808402518	INFRAcontrol R 180°, infrared motion switch, 3-wire, 1000W, arctic-white



INFRAcontrol 3D 180º UP IP20 Flush mounted infrared motion switch (50x50mm DIN 49075), detection angle: 180º, detection range: approx. 10m, switching time: 4-240 seconds, light treshold adjustable with slide switch: permanentlyOFF, automatic, permanently ON, 3-wire device for resistive and nductive loads switching capacity: max. 1000 Watts, 230V~, 50/60Hz, in Technic-Center packaging, arctic-white

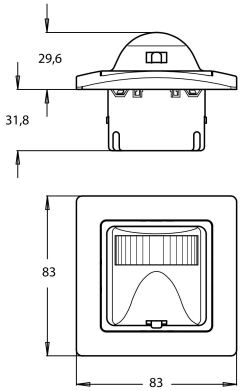

Technical data	*808402518*
Connection type	Screwed terminal
Height	57.0 mm
Depth	29.6 mm
Voltage type	AC
Switching-on delay	0 s
Switch-off delay	0 s
Frequency	50 - 50 Hz
Built-in width	55.0 mm
Staircase monitoring	no
Bridging switch	yes
Suitable for wireless transmission	no
Max. switching power	1000 W
Material	Plastic
Dim function with dimmer basic element	no
Diameter detection range on floor	20 m
Remote operation	no
Impact strength	IK00
With connection cable	no
Nominal voltage	230 - 230 V
With alarm function	no
Transparent	no
Detection angle horizontal	0 - 180 °
Min. switch-on time	4 s
Max. duty cycle	4 min
Optimum mounting height	1.1 m
Pivoting range sensor, horizontal	0 0 0 °
Pivoting range sensor, vertical	0 - 0 °
Number of switching zones	1
With DALI interface	no
Min. depth of built-in installation box	32.0 mm
Compatible with Apple HomeKit	no
Compatible with Google Assistant	no

Technische Beschreibungen, Abbildungen und Leistungsangaben stellen keine zugesagten Eigenschaften dar, sondern sind nur unverbindliche Informationen. Änderungen aufgrund technischen Fortschritts, Normänderungen, veränderter Fertigungsverfahren oder Konstruktionverbesserungen bleiben ausdrücklich vorbehalten. Stand: *10.08.2026*

Technical data	*808402518*
Compatible with Amazon Alexa	no
Max. switching power LED	300 W
Mounting method	Flush mounted
Colour	arctic white
Width	55.0 mm
Model	Movement sensor
Halogen free	no
Surface protection	Untreated
Creep-under protection	no
Built-in depth	32.0 mm
With remote control	no
Built-in diameter	50 mm
Suitable for wall mounting	yes
Max. transmission range frontally	10.000 m
Max. transmission range sideways	10.000 m
Temperature	0 - 40 °C
Max. starting current	2.00 A
HVAC-control	no
Constant light control	no
Substation input	no
RAL-number (similar)	9016
With signal unit	no
Teach-function for response value luminosity	no
Networkable	no
Forced switch off	no
Response value luminosity adjustable	yes
IFTTT support available	no
Degree of protection (IP)	IP20
Animal zone	no
Material quality	Thermoplastic
Surface finishing	Glossy
Sensor type	Passive infrared
Response value sensitivity adjustable	Yes
Anti-bacterial treatment	no
Suitable for ceiling mounting	No
With acoustic sensor	no
Background monitoring	No
Farbe (Kopp-Bezeichnung)	arctic white

Technische Beschreibungen, Abbildungen und Leistungsangaben stellen keine zugesagten Eigenschaften dar, sondern sind nur unverbindliche Informationen. Änderungen aufgrund technischen Fortschritts, Normänderungen, veränderter Fertigungsverfahren oder Konstruktionverbesserungen bleiben ausdrücklich vorbehalten. Stand: *10.08.2026*