Dichtungsring für Zwischenring
DN 800/ Konus 800/ 600

Einbau- und Montageanleitung

Dichtungsring

(Seite 2)

Assembly and Installation Instructions

Rubber Seal

(Page 3)

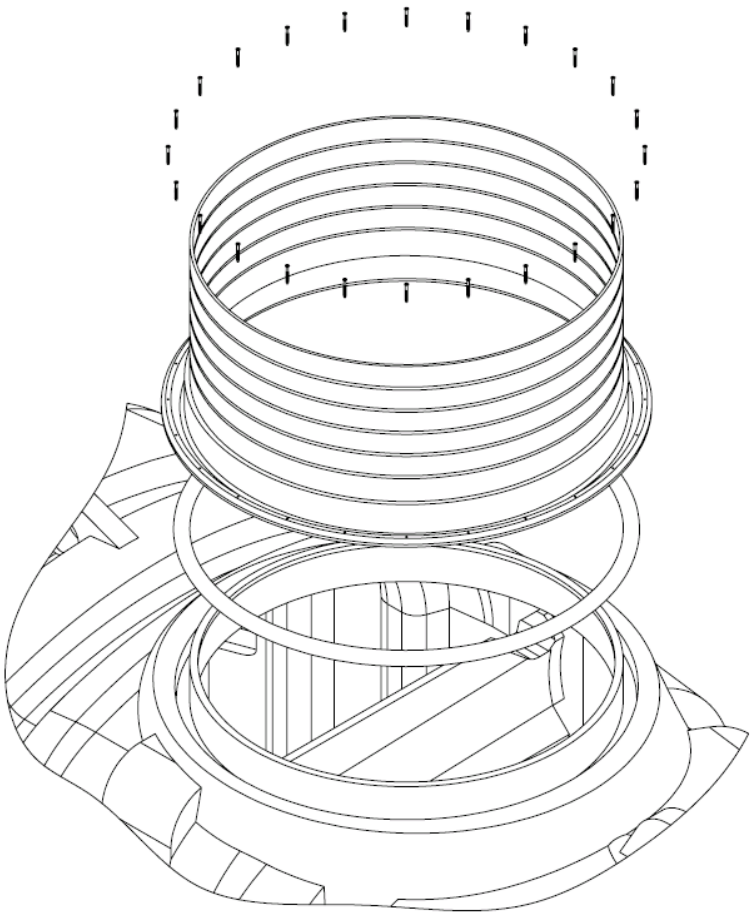

1. Einbauskizze

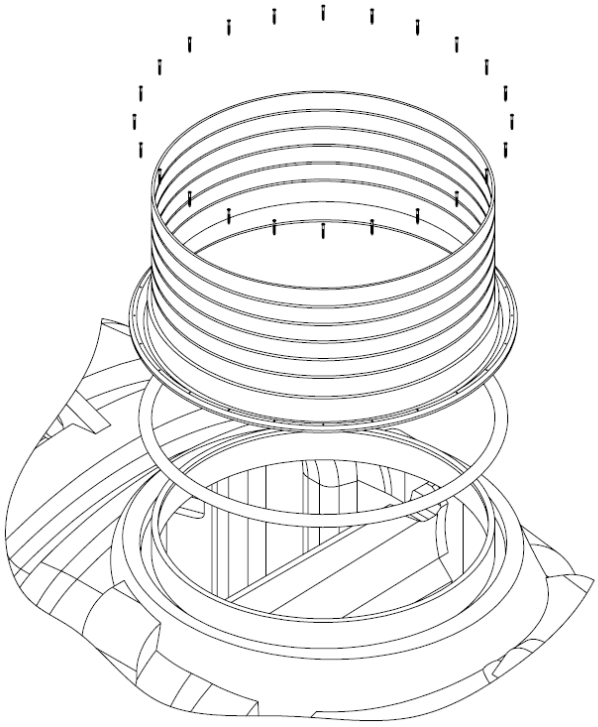

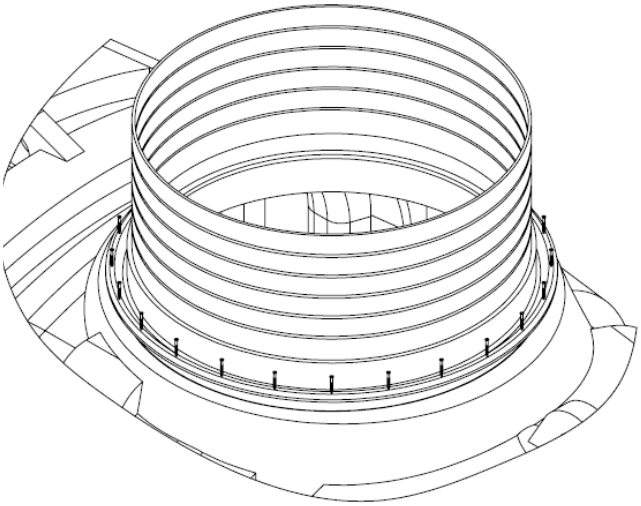

2. Lieferumfang

- Dichtungsring DN800
- 26 Stück Edelstahlschrauben 5,0 x 40mm

3. Montage

1. Den Dichtungsring wie abgebildet in die umlaufende Vertiefung/ Rille einlegen.
2. Etwas Gleitmittel auf die Außenfläche des Einstiegsdoms auftragen, auf der der Zwischenring/ Konus geschoben werden soll.
3. Zwischenring/ Konus aufsetzen und kontrollieren, ob der Dichtungsring gleichmäßig um den Einstiegsdom anliegt, gegebenenfalls korrigieren.
4. Nun den Konus/ Zwischenring mit den 24 Schrauben (2 Schrauben sind Reserve) am Tank festschrauben. Die Markierung am Zwischenring / Konus nutzen.

Zu beachten:
- die Schrauben immer versetzt/ gegenüberliegend einschrauben
- erst alle Schrauben leicht einschrauben
- alle Schauben versetzt festziehen.

Hinweis: Während der Montage des Dichtungsrings müssen Verformungen vermieden werden.

www.rewatec.de
Technische Änderungen und Rechte vorbehalten. Keine Haftung für Druckfehler.
Die Inhalte der technischen Dokumentation sind Bestandteil der Garantiebedingungen
Es sind bei Planung und Einbau die einschlägigen Normen und andere Regelwerke sowie
die Unfallverhütungsvorschriften zu beachten.

1. Drawing

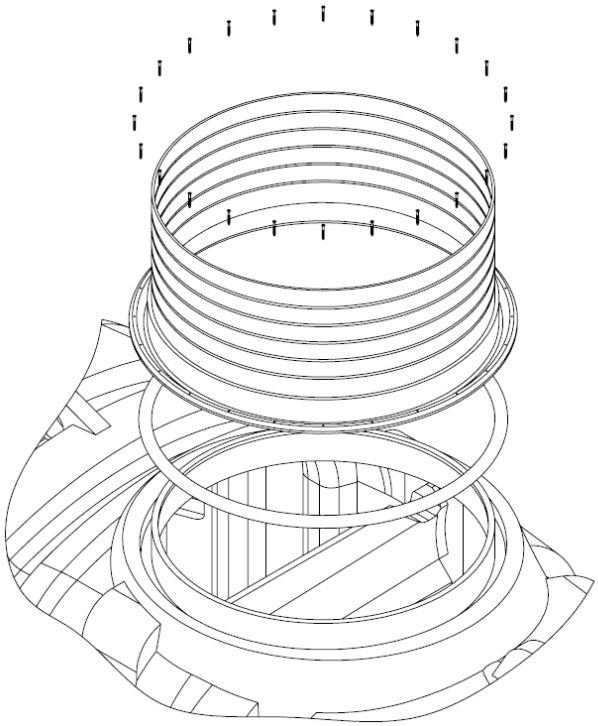

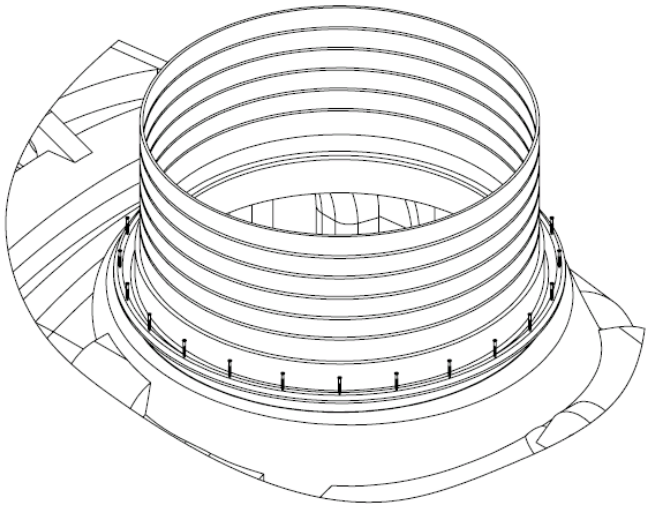

2. Delivery

- Rubber seal DN800
- 26 piece of stainless steel screws 5,0 x 40mm

3. Assembly

1. Push the rubber seal in to the well.
2. Put some lubricant on the outside of the entrance shaft, where the spacer ring/ cone will be pushed over.
3. Put on the spacer ring/ cone checking that the rubber seal lies evenly around the spacer ring, and if necessary adjust position.
4. Now tighten the spacer ring/ cone with 24 screws (2 screws in reserve). Use the mark on the spacer ring/cone.

To be considered:

- The screws have to be screwed in opposite directions.
- In the beginning tighten the screws slightly
- Then tighten the screws in opposite direction

Note: During the installation distortion of the spacer ring must be avoided

www.rewatec.de
Technical changes and rights reserved. No liability for misprints
The contents of the technical documentation are a component of the guarantee terms
Planning and installation regulations are to be followed, as well as the accident prevention regulation

Notizen / Notes

Premier Tech Aqua GmbH
Telefonische Fachberatung: +49-(0)38847-6239-0
www.premiertechaqua.de
ptad@premiertech.com